

CPCI Power Supply

250W Series



FEATURES

- Wide input range
- Over-current and Over-voltage protections
- Output short circuit protection
- Reverse input polarity protection
- N+1 Redundancy

ENVIRONMENTAL

Storage Temp: -40°C to +85°C

Operating Temp: 0°C to +50°C

SAFETY / EMC

UL, TUV, CE, CSA

MECHANICAL

ELECTRICAL SPECIFICATIONS

INPUT

Input voltage range -36 ~ -75VDC or 85 ~ 264Vac

OUTPUT

Output Power 250W


Efficiency >70%

Turn on/off overshoot ±10% V out

Current sharing imbalance <10%

ORDERING INFORMATION

Model	Input	Output	Power	Size (mm)
AD251M5-4M1	85~264Vac	3.3V/40A, 5V/40A 12V/5.5A, -12V/2A	250W	186 x 131 x 40
DD251M3.3-4M1	36 - 75VDC	3.3V/40A, 5V/40A 12V/5.5A, -12V/2A	250W	186 x 131 x 40

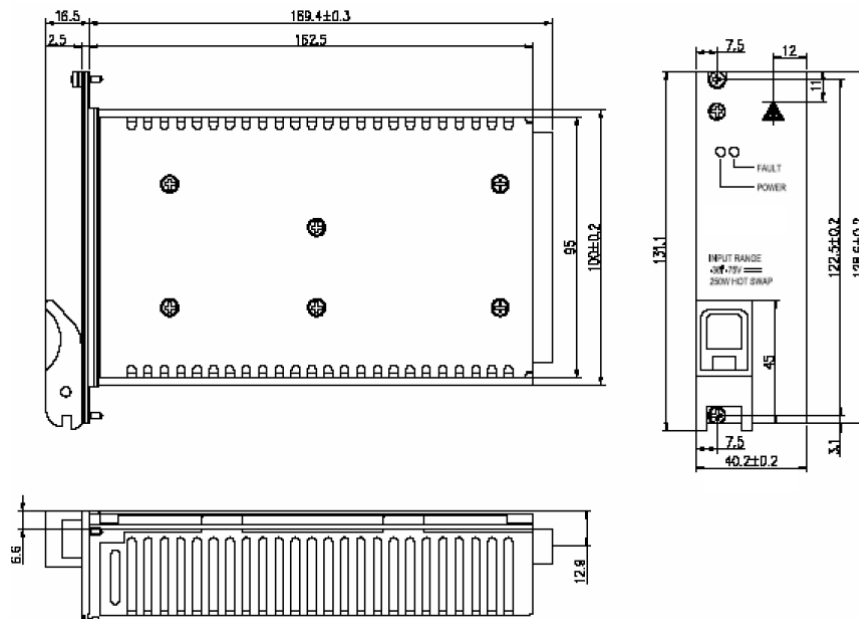

Specifications subject to change without notice

Safety Power Group Ltd

9, Farnborough Business Centre, Eelmoor Road, Farnborough, Hampshire. GU14 7QN

Tel: +44 (0) 1252 515565

Fax: +44 (0) 1252 546021

e-mail: sales@safety-power.com

web: www.safety-power.com